


PERFORMANCE CHART AT N=2850RPM

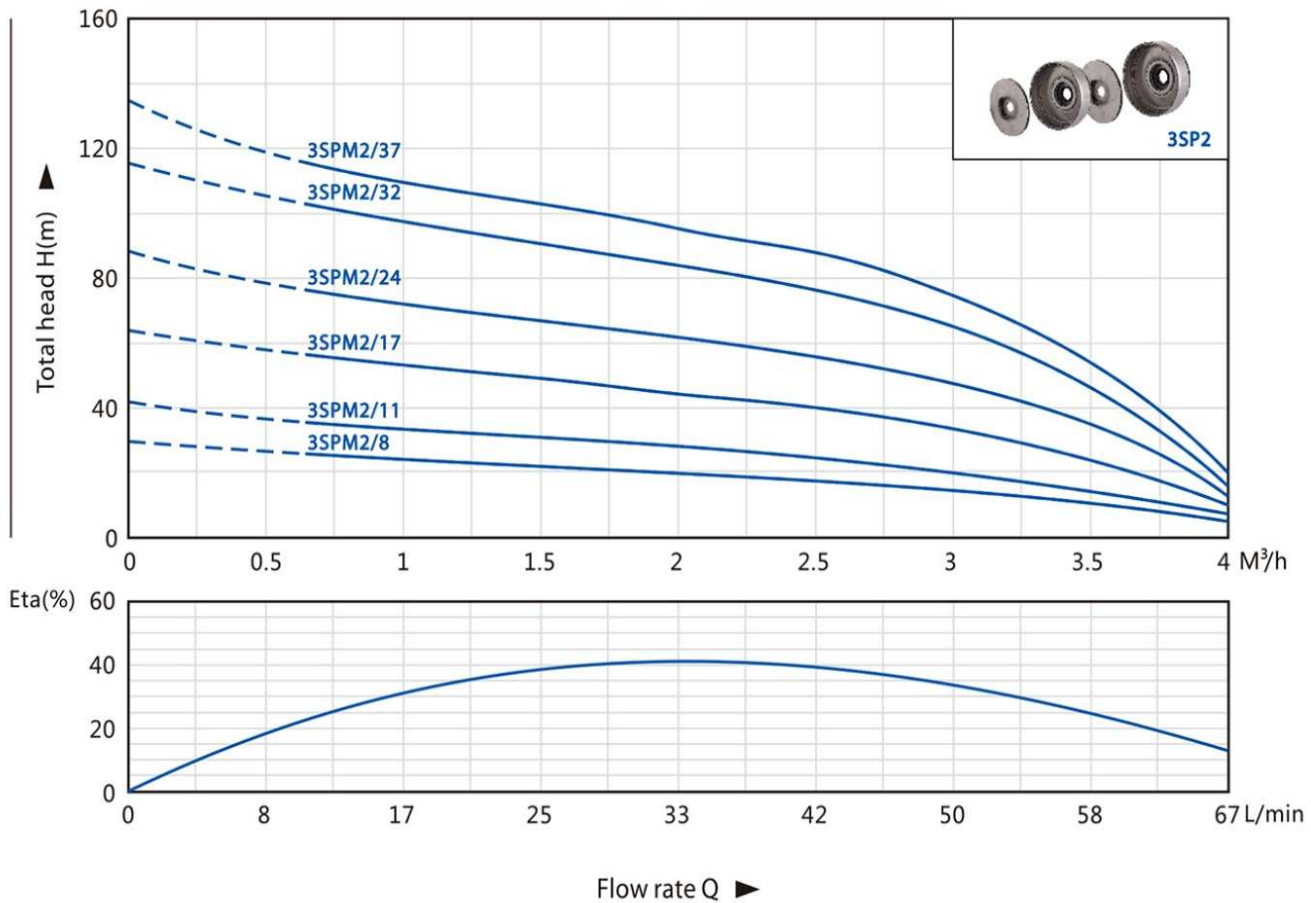

PERFORMANCE DATA 50Hz

Model	Power		Capacity & Head									
			n=2850 r.p.m									
	kW	HP	Q(M³/h)	0	0.5	1	1.5	2	2.5	3	3.5	4
1~ 220V-240V			Q(L/min)	0	8	17	25	33	42	50	58	67
3SPM2/8	0.25	0.33	H(m)	30	26	24	22	21	19	16	10	6
3SPM2/11	0.37	0.5		41	35	33	31	29	26	22	16	8
3SPM2/17	0.55	0.75		63	56	51	48	44	41	34	21	10
3SPM2/24	0.75	1		89	79	72	67	62	58	48	32	12
3SPM2/32	1.1	1.5		118	105	96	90	83	77	64	48	14
3SPM2/37	1.5	2		137	118	111	103	96	89	74	56	16

DIMENSIONS & WEIGHTS

Model	DN	DIMENSION (mm)			WEIGHT (kg)		
		P	M	T	P	M	T
1~ 220V-240V							
3SPM2/8	1¼"	290	390	632	1.6	4.9	6.5
3SPM2/11	1¼"	350	430	732	2	5.5	7.5
3SPM2/17	1¼"	470	430	852	2.8	6.5	9.3
3SPM2/24	1¼"	610	470	1032	3.8	7.5	11.3
3SPM2/32	1¼"	770	555	1277	4.9	9.5	14.4
3SPM2/37	1¼"	870	605	1427	5.8	10.8	16.6

